

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/004421 A2

(51) International Patent Classification⁷: **H05B 33/00**

(21) International Application Number:
PCT/IB2003/002905

(22) International Filing Date: 19 June 2003 (19.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 28 939.5 28 June 2002 (28.06.2002) DE

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, LC, LK, LR, LS, LT, LU, LV, MA, MC, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BECHTEL, Helmut** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). **BUSSELT, Wolfgang** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen

(DE). **BOERNER, Herbert** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). **BERTRAM, Dietrich** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(74) Agent: **MEYER, Michael**; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ELECTROLUMINESCENT DEVICE WITH A TRANSPARENT CATHODE**



(57) Abstract: The invention relates to an electroluminescent device with a transparent cathode. Said electroluminescent device comprises a substrate (1) and, adjacent to said substrate (1), a laminated body composed of a first electrode (2), an electroluminescent layer (3) and a second metallic electrode (4). Said second electrode (4) is covered with transparent dielectric layers (5), which increase the transmission of light through the second metallic electrode (4) and serve as filters.

BEST AVAILABLE COPY

Electroluminescent device with a transparent cathode

The invention relates to an electroluminescent device comprising a substrate and a laminated body composed of a first electrode, an electroluminescent layer and a second electrode.

Various embodiments of electronically driven display systems based on
5 different principles are known and in widespread use.

In accordance with one of said principles use is made of organic light-emitting diodes, so-termed OLEDs, as the light source. Organic light-emitting diodes are built up of a plurality of function layers. In "Philips Journal of Research, 1998, 51, 467", a description is given of a typical structure of an OLED. A typical structure comprises an ITO (indium tin
10 oxide) layer as the transparent electrode (anode), a conductive polymer layer, an electroluminescent layer, i.e. a layer of a light-emissive material, in particular a light-emissive polymer, and an electrode of a metal, preferably a metal having a low work function, (cathode). Such a structure is usually provided on a substrate, generally glass. The light generated reaches the viewer through the substrate. An OLED comprising a light-
15 emissive polymer in the electroluminescent layer is also referred to as a polyLED or PLED.

At present, the majority of the OLEDs are passively driven. However, this is possible only in the case of small display screen diagonals. To operate larger display systems it is necessary, for efficiency reasons, to switch over to active-matrix operation. In an active OLED the first electrode is structured so as to be pixel-shaped, and each pixel electrode is
20 driven separately. To actively drive an OLED at least two thin-film transistors and one capacitor for each pixel electrode are necessary. As a result of the space requirement of the components necessary to drive the pixel electrodes, OLEDs have been developed such that the transistors and capacitors are provided on the substrate, and the light leaves the electroluminescent device through a transparent cathode. Such an electroluminescent device
25 is described, for example, in "13-inch Full Color Organic EL Display", Kaizen Flash 2001.

For efficiency reasons, only metals can suitably be used as the cathode materials. To obtain a sufficiently high conducting power of the metal layer, a layer thickness in the range of 10 to 30 nm is necessary, which leads to a low transmission of the light generated in the electroluminescent device.

Therefore, it is an object of the present invention to provide an improved electroluminescent device with a cathode exhibiting a high transmission of the light emitted by the electroluminescent layer.

Color electroluminescent devices often require the use of a filter, in particular a color filter. It is desirable that the manufacture of the color filter can be readily integrated in the manufacturing process of the electroluminescent device.

Therefore, it is a further object of the present invention to provide an improved electroluminescent device with a filter, in particular a color filter.

These objects are achieved by an electroluminescent device comprising a substrate and, adjacent to said substrate, a laminated body composed of a first electrode, an electroluminescent layer, a second electrode and $2n+1$ transparent dielectric layers, where $n = 0, 1, 2, 3 \dots \alpha$, the transparent dielectric layers alternately have a high refractive index of $n > 1.7$ and a low refractive index of $n \leq 1.7$, and the transparent dielectric layer bordering on the second electrode has a high refractive index of $n > 1.7$.

As the transparent, dielectric layer bordering on the second electrode has a high refractive index n , the reflection of the light generated by the electroluminescent layer is reduced at the second metallic electrode and more light passes through the second electrode. By means of the further transparent dielectric layers, a filtering effect in accordance with Bragg's principle is generated. Thus, the transmission properties can be adapted to the emission spectrum of the light generated. In addition, the filtering effect of the transparent, dielectric layers enables the emission color of the electroluminescent device to be varied in a simple manner, or it enables a color filter structure for color electroluminescent devices to be generated. The actual manufacturing process of the electroluminescent device remains unchanged because the transparent dielectric layers are provided only at the end of the process.

The advantageously selected materials as claimed in claims 2 and 3 exhibit a high transmission in the wavelength range of visible light.

These and other aspects of the invention will be apparent from and elucidated with reference to five Figures and four examples.

In the drawings:

Fig. 1 is a cross-sectional view of an electroluminescent device,

Fig. 2 shows the transmission curves of two conventional electrodes,

Fig. 3 shows the transmission curves of two electrodes covered with a transparent layer,

Fig. 4 shows the transmission curve of an electrode which is covered with three transparent, dielectric layers, and

5 Fig. 5 shows the transmission curve of an electrode which is covered with seven transparent, dielectric layers.

In accordance with Fig. 1, an electroluminescent device comprises a substrate
10 1, for example a glass plate, a polymer foil, a semiconductor or a ceramic wafer. Dependent upon the material used, said substrate 1 is light-transmitting or opaque. If the electroluminescent device is actively driven, then active and passive components, such as transistors and capacitors, are situated in or on the substrate 1.

On the substrate 1 there is provided a first electrode 2 that serves as an anode.
15 Said electrode 2 may contain, for example, p-doped silicon or indium-doped tin oxide (ITO). An isolating layer may be situated between the substrate 1 and the first electrode 2.

An electroluminescent layer 3 is provided on the first electrode 2. Said electroluminescent layer 3 contains either a light-emitting polymer or small, organic molecules. Dependent upon the material type used in the electroluminescent layer 3, the
20 devices are referred to as LEPs (Light Emitting Polymers) or also as polyLEDs, or as SMOLEDs (Small Molecule Organic Light Emitting Diodes). The electroluminescent layer 3 preferably contains a light-emitting polymer. Said light-emitting polymer may be, for example, poly(*p*-phenylene vinylene) (PPV) or a substituted PPV, such as dialkoxy-substituted PPV.

25 The second electrode 4, which borders on the electroluminescent layer 3, may contain, for example, a metal such as aluminum, copper, silver or gold, or an alloy. It may be preferred that the second electrode 4 comprises two or more conductive layers. It may be particularly preferred that the second electrode 4 comprises a first layer, which borders on the electroluminescent layer 3 and is composed of an alkaline earth metal, such as calcium or
30 barium, and a second layer of aluminum, copper, silver or gold.

In the case of a passively driven electroluminescent device, the electrodes 2, 4 are provided such that they form a two-dimensional array. In the case of an actively driven electroluminescent device, the first electrode 2 is structured so as to be pixel-shaped, and each pixel electrode is separately driven.

Alternatively, the laminated body may comprise additional layers such as a hole-transporting layer and/or an electron-transporting layer. A hole-transporting layer is arranged between the first electrode 2 and the electroluminescent layer 3. An electron-transporting layer is situated between the second electrode 4 and the electroluminescent layer 3. Both layers preferably contain conductive polymers.

The electroluminescent layer 3 may be divided into a plurality of color pixels emitting light in the colors red, green and blue. To generate colored light, the material in the electroluminescent layer 3 may be doped with fluorescent dyes, or a polymer emitting colored light is used as the material in the electroluminescent layer 3. In a different embodiment, a polymer is used in the electroluminescent layer 3, which polymer emits light in a broad wavelength range, and a color filter is used to generate, from this light, light in any one of the three primary colors red, green or blue.

On the second electrode 4 a number of transparent dielectric layers 5 is provided equal to $2n+1$, where $n = 0, 1, 2, 3 \dots \alpha$. Said transparent dielectric layers 5 alternately have a high refractive index of $n > 1.7$ and a low refractive index of $n \leq 1.7$. The first transparent, dielectric layer 6, which borders on the second electrode 4, has a high refractive index of $n > 1.7$.

The reflection of the light emitted by the electroluminescent layer 3 at the metallic, second electrode 4 is reduced by the first transparent, dielectric layer 6 and hence the transmission of the light through the second electrode 4 is increased.

By means of the further, transparent, dielectric layers, the transmission property of the second electrode 4 can be adapted to the emission spectrum of the light emitted by the electroluminescent layer 3. By the variation of the refractive index in the layer sequence, a filter in accordance with Bragg's principle is generated.

The transparent, dielectric layers having a high refractive index, i.e. a refractive index of $n > 1.7$, may contain inorganic materials, such as ZnS, TiO₂ or SnO₂, or organic materials. Preferably, the transparent, dielectric layers having a high refractive index contain ZnS.

The transparent, dielectric layers having a low refractive index, i.e. a refractive index of $n \leq 1.7$, may contain, for example, inorganic materials, such as SiO₂ or MgF₂, or organic materials. Preferably, the transparent, dielectric layers having a low refractive index contain MgF₂.

By applying a suitable voltage of, typically, a few volts to the electrodes 2, 4, positive and negative charge carriers are injected, which migrate to the electroluminescent

layer 3 where they recombine, thereby generating light. In the case of a light-transmitting substrate 1, said light is emitted, on the one hand, by the first electrode 2 and the substrate 1 and, on the other hand, by the second electrode 4 and the transparent, dielectric layers 5. If the substrate 1 is opaque, then light is emitted only by the second electrode 4 and the transparent, dielectric layers 5.

Fig. 2 shows the transmission curves 7, 8 of two conventional electrodes and the emission spectrum 9 of an electroluminescent device comprising a 140 nm thick ITO layer as the first electrode, a 200 nm thick layer of polyethylene dioxythiophene (PDOT) as the hole-transporting layer, a 80 nm thick layer of PPV as the electroluminescent layer, and a 5 nm thick Ba layer and a 200 nm thick Al layer as the second electrode. Curve 7 shows the transmission of an electrode comprising a 5 nm thick Ba layer and a 25 nm thick Ag layer. Curve 8 shows the transmission of an electrode comprising a 5 nm thick Ba layer and a 15 nm thick Al layer.

Fig. 3 shows the transmission curves 10, 11 of two electrodes covered with a transparent dielectric layer of ZnS. Curve 10 shows the transmission of an electrode which comprises a 5 nm thick Ba layer and a 25 nm Ag layer and which is covered with a 38 nm thick ZnS layer. Curve 11 shows the transmission of an electrode which comprises a 5 nm thick Ba layer and a 15 nm thick Al layer and which is covered with a 43 nm thick ZnS layer. The emission spectrum 9 that is also shown in the drawing is identical to that shown in Fig. 2.

Fig. 3 shows that, in both cases, the adjoining, transparent, dielectric layer causes the transmission of the light emitted by the electroluminescent layer 3 through the metallic electrode to be substantially increased.

In addition, the transmission in the blue spectral region is reduced. This filtering effect, particularly in conjunction with a circular polarizer, enables the daylight contrast to be increased.

Fig. 4 shows the transmission curve of an electrode which is covered with three transparent, dielectric layers 5 of ZnS and MgF₂. Curve 12 shows the transmission of an electrode which comprises a 5 nm thick Ba layer and a 25 nm thick Ag layer and which is covered with a layer sequence of a 41 nm thick ZnS layer, a 84 nm thick MgF₂ layer and a 55 nm thick ZnS layer. In this case, the 41 nm thick layer of ZnS borders on the electrode. The emission spectrum 9 that is also shown in Fig. 4 is identical to the emission spectrum 9 shown in Fig. 2.

As becomes apparent from Fig. 4, three transparent, dielectric layers are sufficient to attain a transmission of visible light through the metallic electrode of up to 80%.

Furthermore, the transmission curve is adapted to the emission spectrum of the light generated, such that the transmission maximum of the electrode lies in the range of the emission maximum of PPV. This results, in addition, in a filter effect by the transparent, dielectric layers 5. In this manner, for example, the emission color of the electroluminescent device can be varied.

Fig. 5 shows the transmission curve of an electrode which is covered with seven transparent, dielectric layers of ZnS and MgF₂. Curve 13 shows the transmission of an electrode which comprises a 5 nm thick Ba layer and a 25 nm thick Ag layer, and which is covered with a layer sequence of a 9 nm thick ZnS layer, a 135 nm thick MgF₂ layer, a 62 nm thick ZnS layer, a 160 nm thick MgF₂ layer, a 64 nm thick ZnS layer, a 133 nm thick MgF₂ layer and a 102 nm thick ZnS layer. The 9 nm thick ZnS layer borders on the electrode.

As becomes apparent from Fig. 5, by means of seven transparent, dielectric layers, a transmission curve can be generated whose maximum transmission peaks lie in the wavelength ranges of the three primary colors red, green and blue.

In this embodiment a color filter is obtained by means of the transparent, dielectric layers 5.

Further transparent, dielectric layers enable the width of the transmission peaks to be set to smaller values.

Next, embodiments of the invention will be explained which constitute examples of possible implementations.

Example 1

On a glass plate, which served as the substrate 1, there was provided a 140 nm thick layer of ITO as the first electrode 2, which was subsequently structured. Next, successively a 200 nm thick layer of polyethylene dioxythiophene (PDOT) as the hole-conducting layer and a 80 nm thick layer of poly(*p*-phenylene vinylene) (PPV) as the electroluminescent layer 3 were provided. The second electrode 4 composed of a 5 nm thick layer of Ba and a 15 nm thick layer of Al was provided on the PPV layer. A 43 nm thick layer of ZnS was deposited on the layer of Al.

The transmission properties of the second electrode 4 are shown in curve 11 of Fig. 3. The transmission of light, generated in the electroluminescent layer 3, through the second electrode 4 could be increased in comparison with an uncoated electrode (curve 8 in Fig. 2). In addition, the transmission in the blue spectral region is reduced.

Example 2

An electroluminescent device similar to that in example 1 was manufactured, with the exception that the second electrode contained a 25 nm thick layer of Ag instead of the layer of Al, and the layer of ZnS had a thickness of 38 nm.

5 The transmission properties of the second electrode 4 regarding light emitted by the electroluminescent layer 3 are shown in curve 10 of Fig. 3. In comparison with an uncoated electrode (curve 7 in Fig. 2), the transmission could be increased. In addition, a filtering effect in the blue and red spectral regions was maintained.

10 Example 3

An electroluminescent device similar to that described in example 2 was manufactured, with the exception that three transparent, dielectric layers 5 were deposited on the second electrode 4. The first transparent, dielectric layer 6 of ZnS, which borders on the second electrode 4, had a layer thickness of 41 nm, the second transparent, dielectric layer of 15 MgF₂ had a layer thickness of 84 nm, and the third transparent, dielectric layer of ZnS had a layer thickness of 55 nm.

The transmission properties of the second electrode 4 are shown in curve 12 of Fig. 4. In comparison with a singly coated electrode (curve 10 in Fig. 3), the transmission properties could be adapted to the emission spectrum (see curve 9 in Fig. 4) of an 20 electroluminescent layer of PPV.

Example 4

An electroluminescent device similar to that of example 2 was manufactured, with the exception that seven transparent, dielectric layers 5 were deposited on the second 25 electrode 4. The first transparent, dielectric layer 6 of ZnS, which borders on the second electrode 4, had a layer thickness of 9 nm, the second transparent, dielectric layer of MgF₂ had a layer thickness of 134 nm, the third transparent, dielectric layer of ZnS had a layer thickness of 62 nm, the fourth transparent, dielectric layer of MgF₂ had a layer thickness of 166 nm, the fifth transparent, dielectric layer of ZnS had a layer thickness of 64 nm, the sixth 30 transparent, dielectric layer of MgF₂ had a layer thickness of 133 nm and the seventh transparent, dielectric layer of ZnS had a layer thickness of 102 nm.

The transmission properties of the second electrode 4 are shown in curve 13 of Fig. 4. The maximum transmission values lie in the wavelength ranges of the three primary colors red, green and blue. The electroluminescent device exhibits not only an increased

transmission to light generated by the electroluminescent layer 3, but also a color filter for the three primary colors.

CLAIMS:

1. An electroluminescent device comprising a substrate (1) and, adjacent to said substrate (1), a laminated body composed of a first electrode (2), an electroluminescent layer (3), a second electrode (4) and $2n+1$ transparent dielectric layers (5), where $n = 0, 1, 2, 3 \dots \alpha$, which transparent dielectric layers (5) alternately have a high refractive index of $n > 1.7$ and a low refractive index of $n \leq 1.7$, and the transparent dielectric layer (6) bordering on the second electrode (4) has a high refractive index of $n > 1.7$.
2. An electroluminescent device as claimed in claim 1, characterized in that the transparent layers having a high refractive index comprise a material selected from the group composed of TiO_2 , ZnS and SnO_2 .
3. An electroluminescent device as claimed in claim 1, characterized in that the transparent layers having a low refractive index comprise a material selected from the group composed of SiO_2 and MgF_2 .

1/3

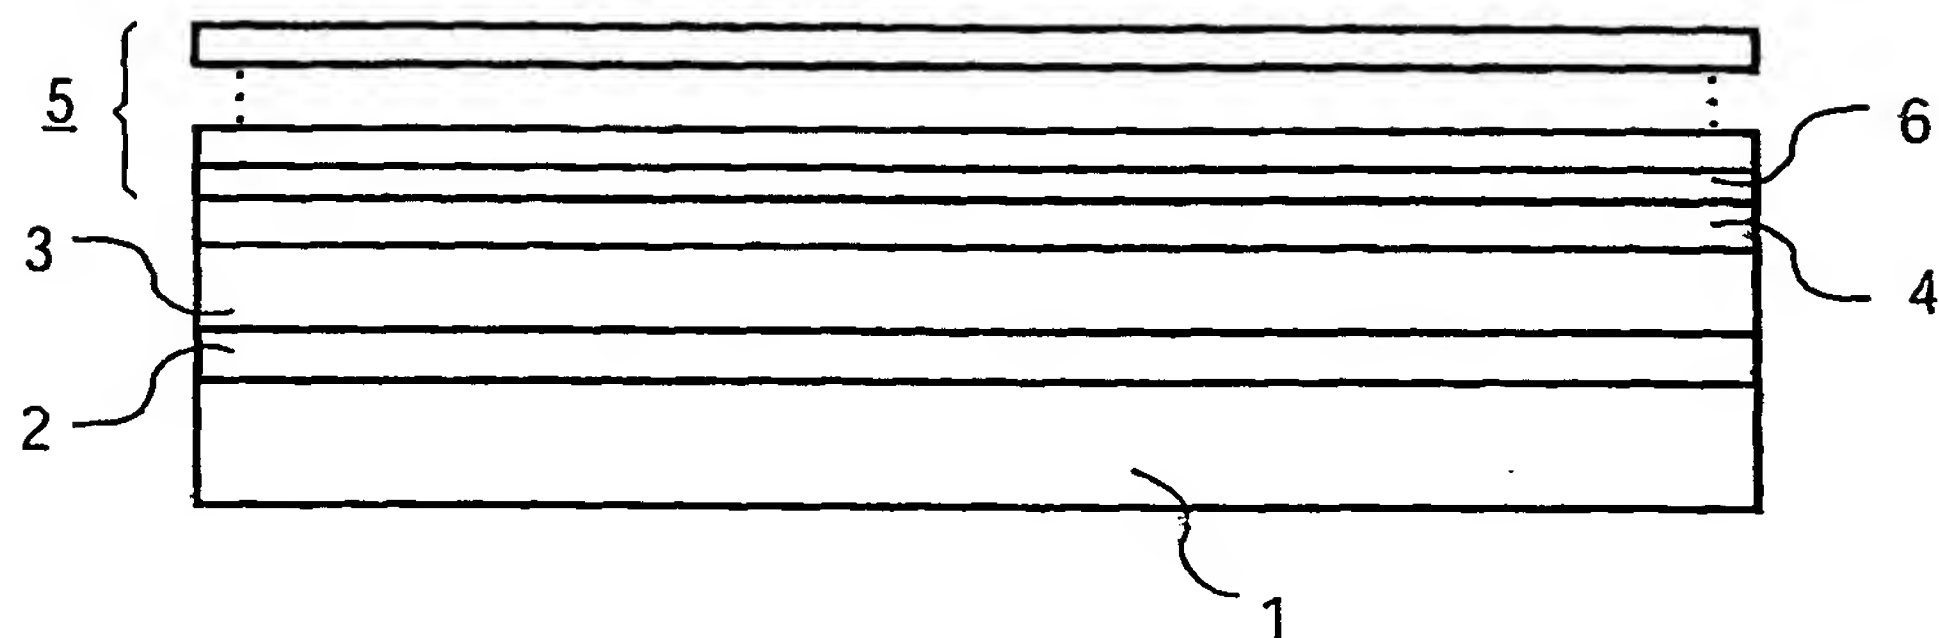


FIG. 1

2/3

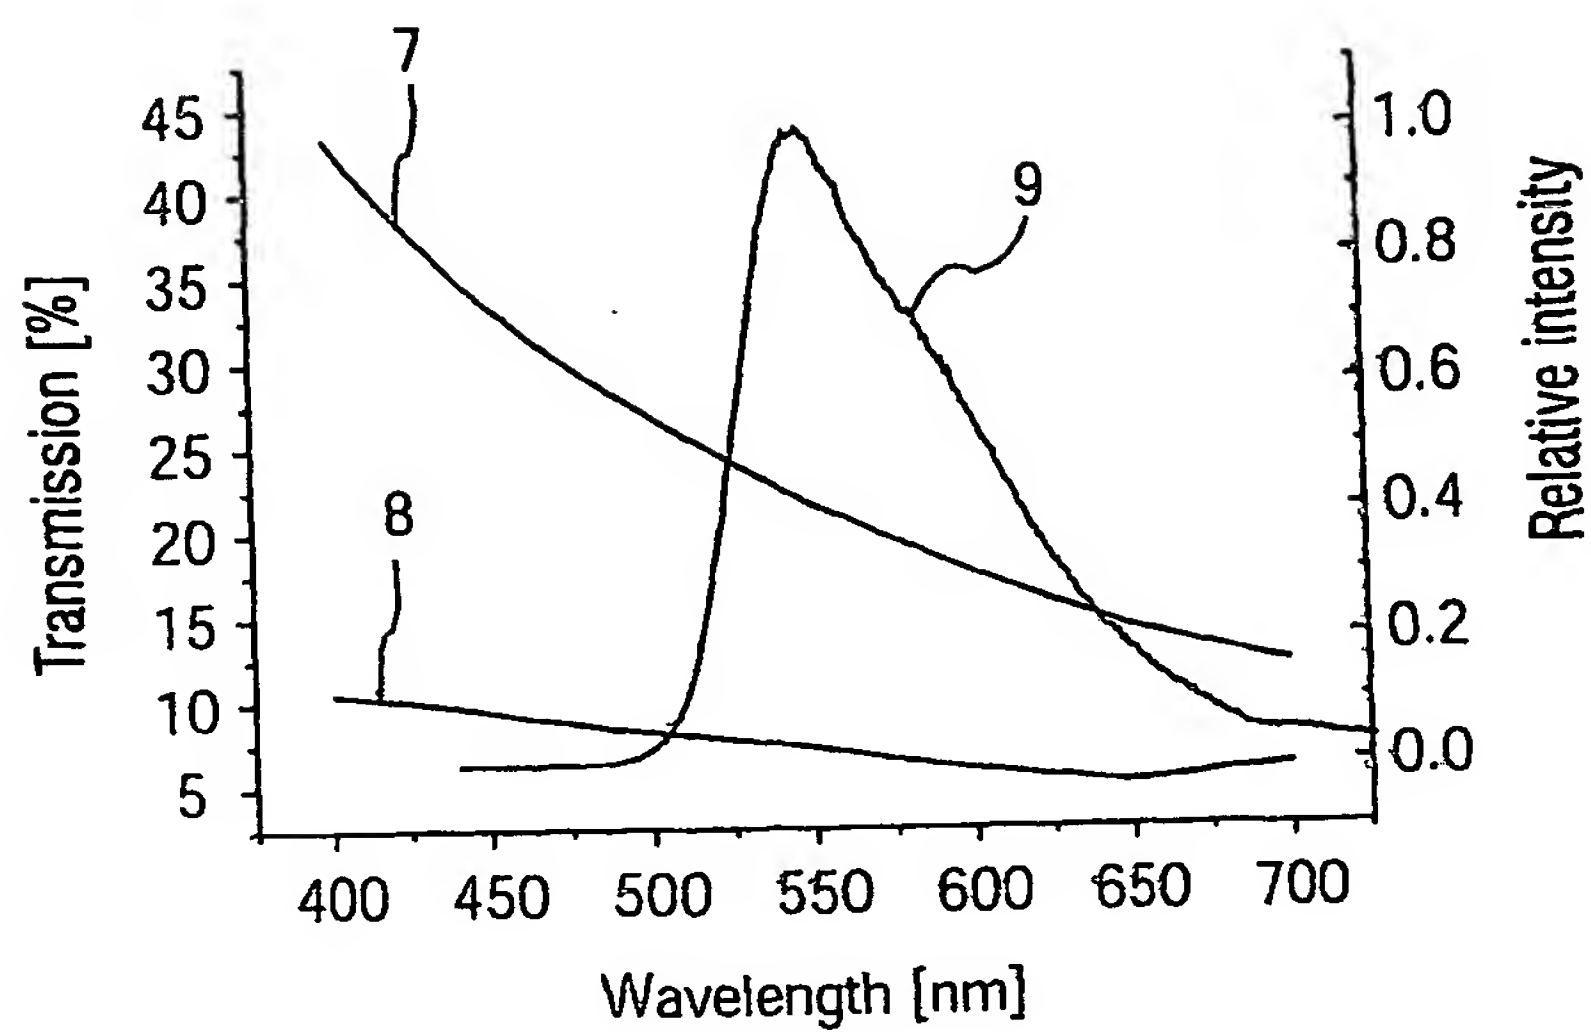


FIG. 2

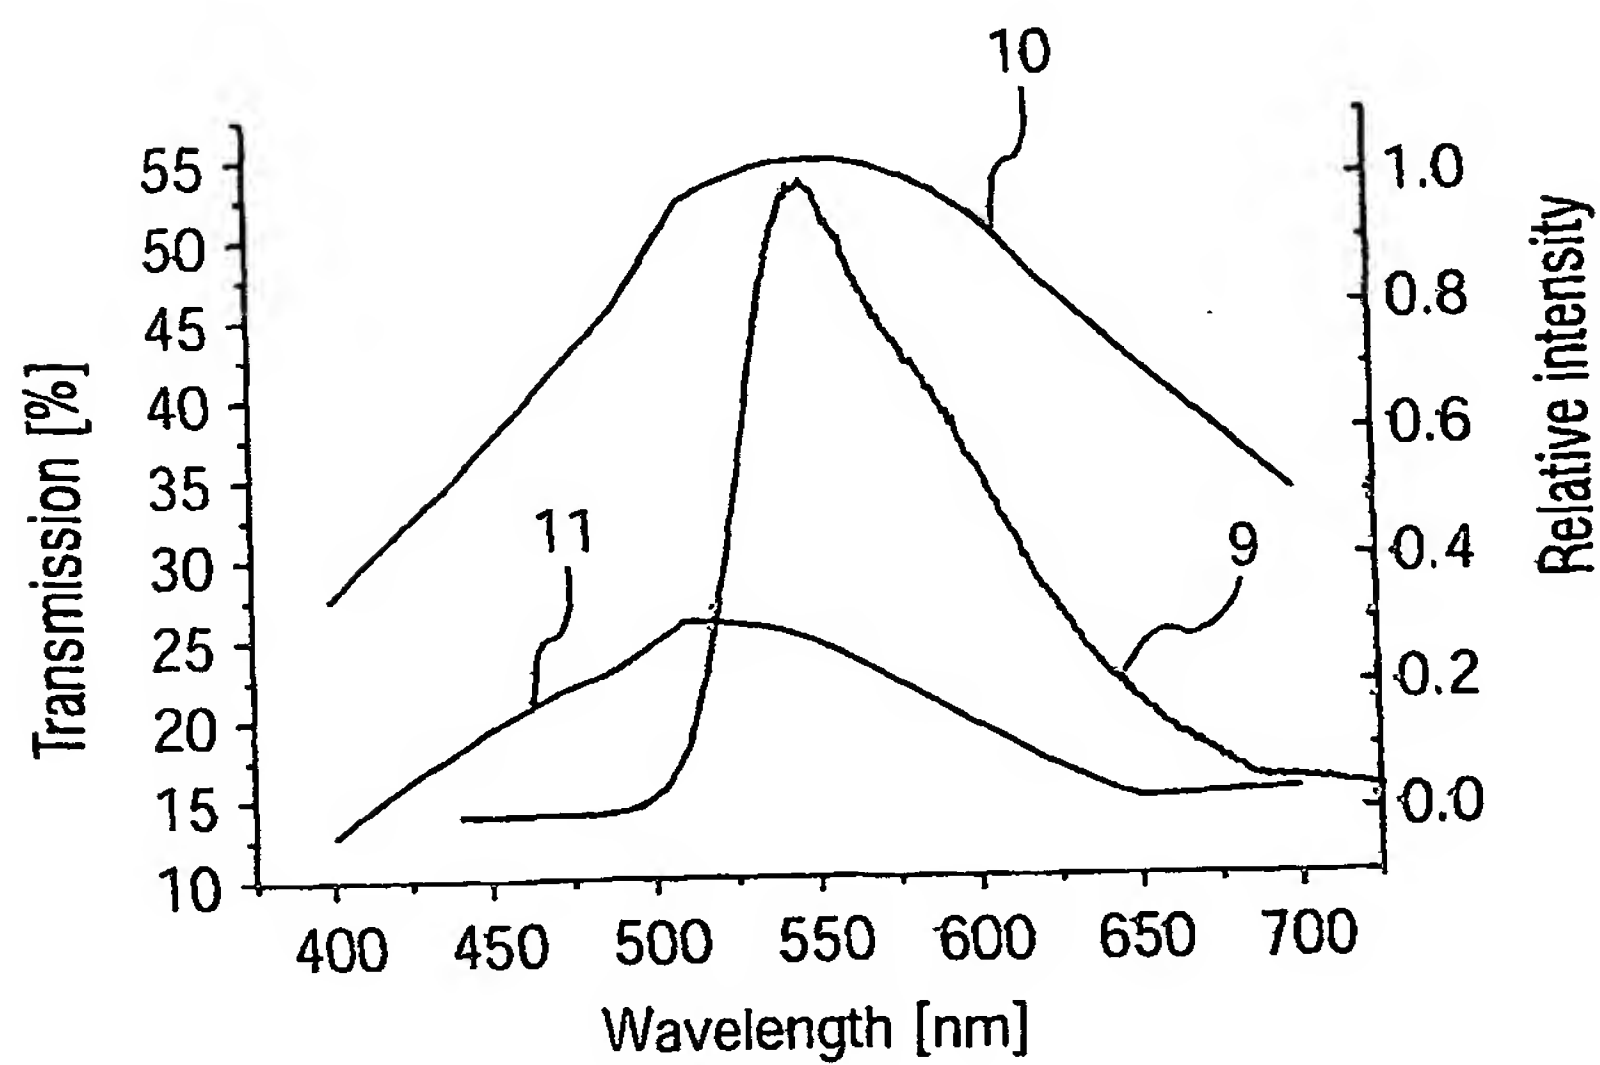


FIG. 3

3/3

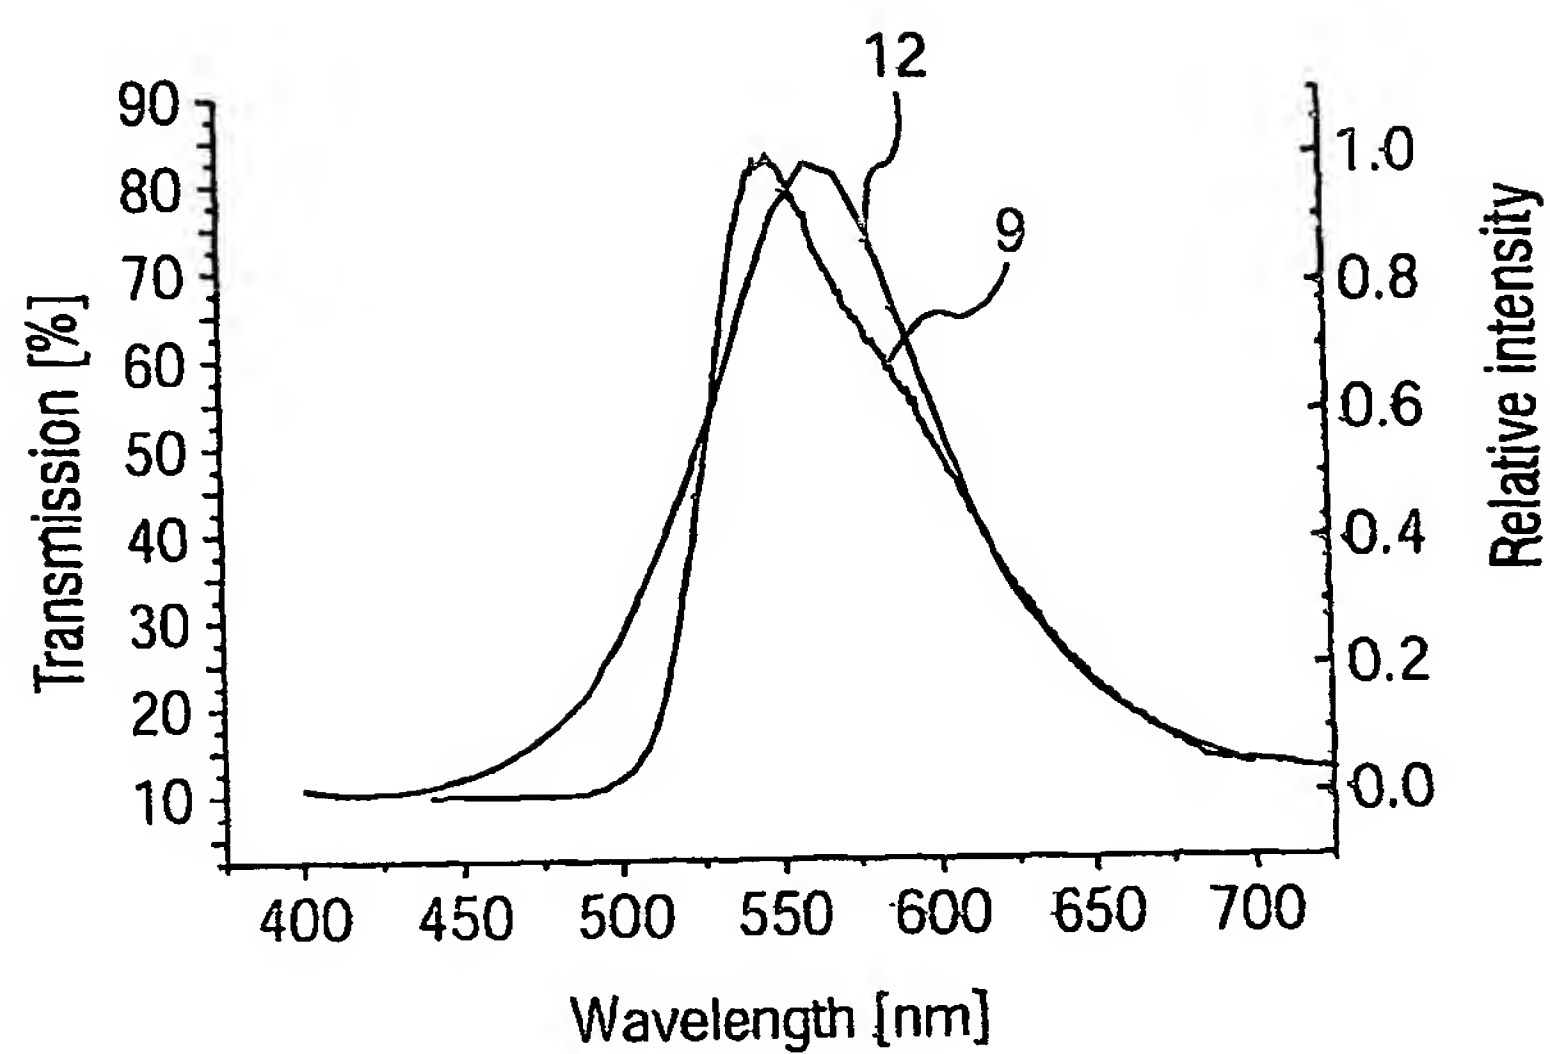


FIG.4

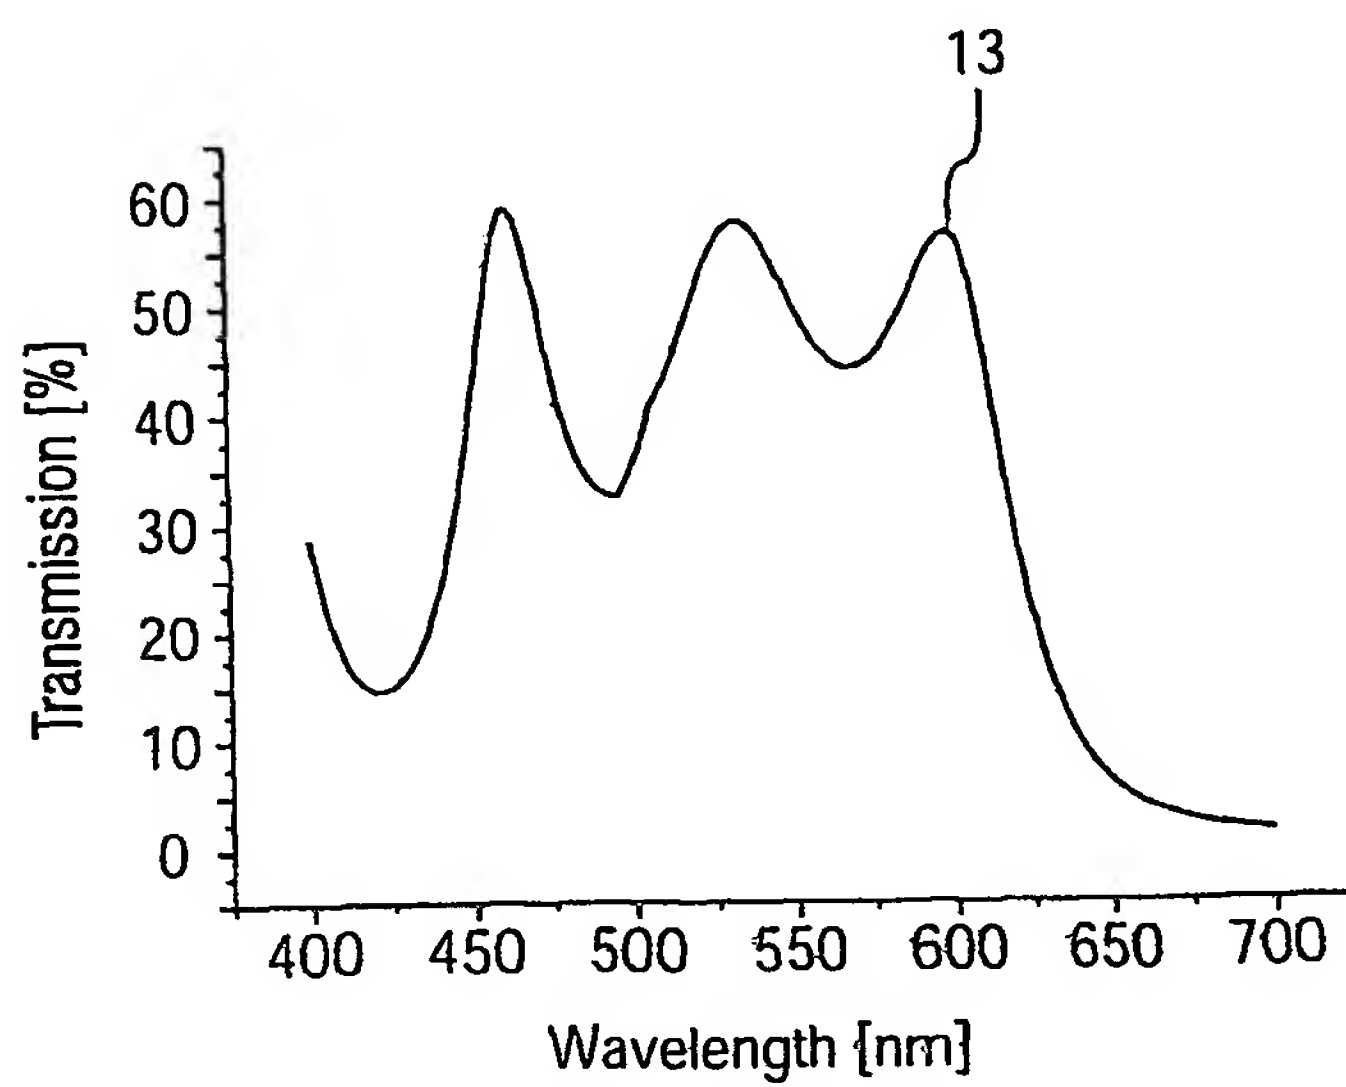


FIG.5

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/004421 A3

(51) International Patent Classification⁷: **H01L 51/20,**
27/00

2, 52066 Aachen (DE). **BERTRAM, Dietrich** [DE/DE];
c/o Philips Intellectual Property & Standards GmbH,
Weisshausstr. 2, 52066 Aachen (DE).

(21) International Application Number:
PCT/IB2003/002905

(74) Agent: **MEYER, Michael**; Philips Intellectual Property &
Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(22) International Filing Date: 19 June 2003 (19.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 28 939.5 28 June 2002 (28.06.2002) DE

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for DE only*): **PHILIPS INTELLECTUAL
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except DE, LC, LK,
LR, LS, LT, LU, LV, MA, MC, MD, MG, MK, MN, MW, MX,
MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW*): **KONINKLIJKE PHILIPS
ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1,
NL-5621 BA Eindhoven (NL).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BECHTEL, Helmut**
[DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weisshausstr. 2, 52066 Aachen (DE). **BUSSELT,**
Wolfgang [DE/DE]; c/o Philips Intellectual Property &
Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
BOERNER, Herbert, Friedrich [DE/DE]; c/o Philips
Intellectual Property & Standards GmbH, Weisshausstr.

(88) Date of publication of the international search report:
19 August 2004

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **ELECTROLUMINESCENT DEVICE WITH A TRANSPARENT CATHODE**



(57) Abstract: The invention relates to an electroluminescent device with a transparent cathode. Said electroluminescent device comprises a substrate (1) and, adjacent to said substrate (1), a laminated body composed of a first electrode (2), an electroluminescent layer (3) and a second metallic electrode (4). Said second electrode (4) is covered with transparent dielectric layers (5), which increase the transmission of light through the second metallic electrode (4) and serve as filters.

INTERNATIONAL SEARCH REPORT

In.donal Application No

PCT/IB 03/02905

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01L51/20 H01L27/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H01L G02B H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 076 368 A (EASTMAN KODAK CO) 14 February 2001 (2001-02-14) column 4, line 40 - column 5, line 41 figure 3	1,2
Y	EP 1 119 221 A (IDEMITSU KOSAN CO) 25 July 2001 (2001-07-25) page 4, line 16 - line 21 page 11, line 36 - line 45	1,2
A	US 6 366 017 B1 (ANTONIADIS HOMER ET AL) 2 April 2002 (2002-04-02) column 3, line 36 - line 58 column 4, line 34 - line 47	1-3

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

28 May 2004

Date of mailing of the international search report

07/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

De Laere, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 03/02905

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN vol. 1999, no. 13, 30 November 1999 (1999-11-30) -& JP 11 224783 A (TOYOTA CENTRAL RES & DEV LAB INC), 17 August 1999 (1999-08-17) abstract; figure 3</p>	1-3
A	<p>CHEN S-F ET AL SOCIETY FOR INFORMATION DISPLAY: "DESIGN ISSUES IN USING THIN-FILM OPTICAL INTERFERENCE FILTERS AS COLOR FILTERS FOR LCD SYSTEM APPLICATIONS" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS. SAN JOSE, JUNE 14 - 16, 1994, SANTA ANA, SID, US, vol. VOL. 25, 14 June 1994 (1994-06-14), pages 411-416, XP000462725 the whole document</p>	1-3
A	<p>JP 50 020683 A (HITACHI LTD) 5 March 1975 (1975-03-05) the whole document</p>	1-3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 03/02905

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1076368	A	14-02-2001	EP 1076368 A2	14-02-2001
			JP 2001052878 A	23-02-2001
EP 1119221	A	25-07-2001	JP 10162959 A	19-06-1998
			JP 10294182 A	04-11-1998
			EP 1119221 A2	25-07-2001
			EP 1119222 A2	25-07-2001
			DE 69723538 D1	21-08-2003
			DE 69727987 D1	08-04-2004
			EP 0845924 A2	03-06-1998
			US 6284393 B1	04-09-2001
US 6366017	B1	02-04-2002	NONE	
JP 11224783	A	17-08-1999	NONE	
JP 50020683	A	05-03-1975	NONE	

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/004421 A3

(51) International Patent Classification⁷: H01L 51/20,
27/00

(21) International Application Number:
PCT/IB2003/002905

(22) International Filing Date: 19 June 2003 (19.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 28 939.5 28 June 2002 (28.06.2002) DE

(71) Applicant (*for DE only*): PHILIPS INTELLECTUAL
PROPERTY & STANDARDS GMBH [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (*for all designated States except DE, US*):
KONINKLIJKE PHILIPS ELECTRONICS N.V.
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven
(NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): BECHTEL, Helmut
[DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weissshausstr. 2, 52066 Aachen (DE). BUSSELT,
Wolfgang [DE/DE]; c/o Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
BOERNER, Herbert, Friedrich [DE/DE]; c/o Philips
Intellectual Property & Standards GmbH, Weissshausstr.
2, 52066 Aachen (DE). BERTRAM, Dietrich [DE/DE];
c/o Philips Intellectual Property & Standards GmbH,
Weissshausstr. 2, 52066 Aachen (DE).

(74) Agent: MEYER, Michael; Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report


(88) Date of publication of the international search report:
19 August 2004

(48) Date of publication of this corrected version:
4 November 2004

(15) Information about Correction:
see PCT Gazette No. 45/2004 of 4 November 2004, Sec-
tion II

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ELECTROLUMINESCENT DEVICE WITH A TRANSPARENT CATHODE

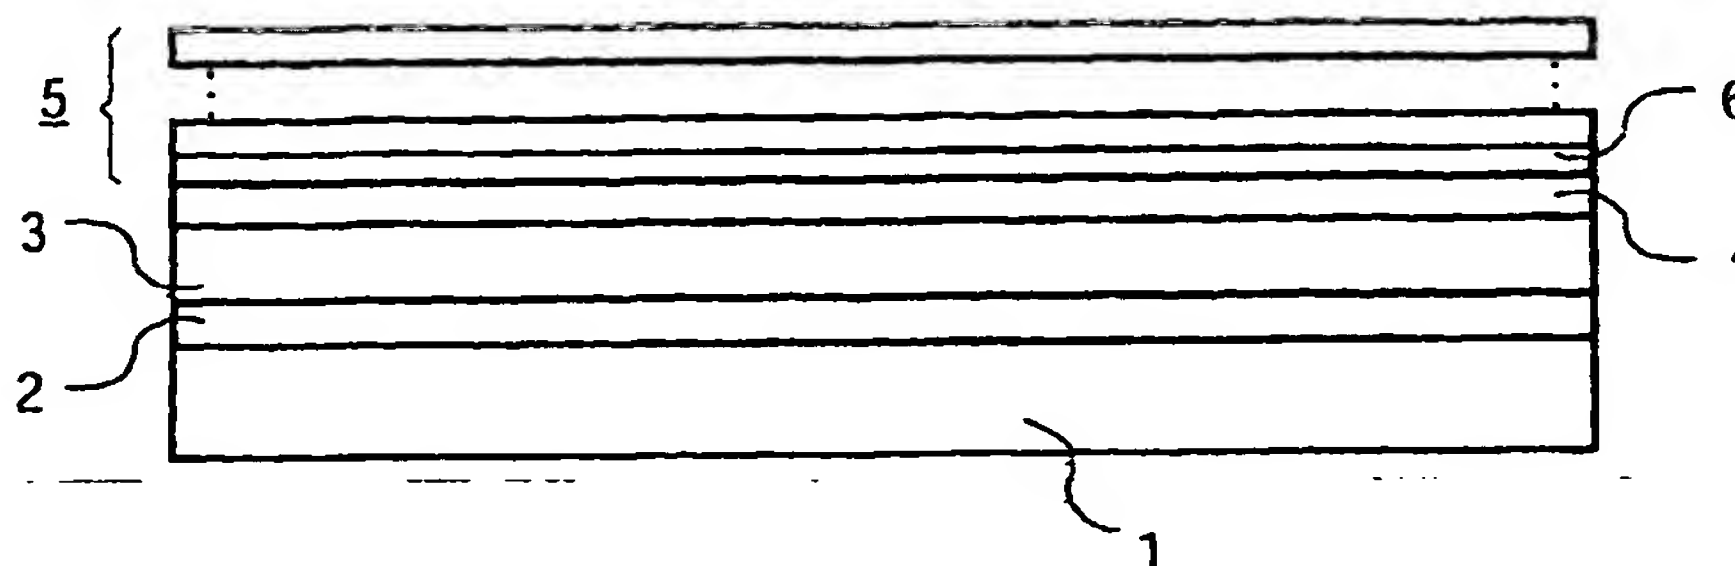

(57) Abstract: The invention relates to an electroluminescent device with a transparent cathode. Said electroluminescent device comprises a substrate (1) and, adjacent to said substrate (1), a laminated body composed of a first electrode (2), an electroluminescent layer (3) and a second metallic electrode (4). Said second electrode (4) is covered with transparent dielectric layers (5), which increase the transmission of light through the second metallic electrode (4) and serve as filters.

WO 2004/004421 A3

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.